


**SPC**  
**SPC ESTURTURE**

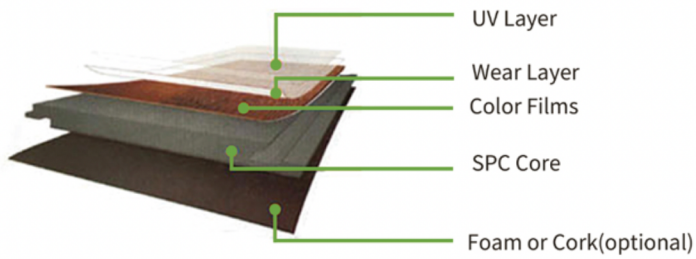

Thickness	3.5mm-8.0mm
Wear resistance	0.3/0.5mm
Density	1.9-2.1g/cm <sup>3</sup>
Installation	Click
Bevel	Painting V-groove
Finish Surface	EIR / Embossed / Deep crystal / Sawmill / Large crystal
MOQ	1 x 20'ft including 4 colors
Packing data	10 pcs / bex, 60 bex / drag, 20 paquets / 20' Fcl

**USE**  
**COMPOSITION**  
**TECHNICAL DATA**

Floor, wall and ceiling covering.  
66% POLYVINYL CHLORIDE - 34% Calcium Carbonate (Limestone)

Density		1.9-2.1g/cm <sup>3</sup>
Dimensional stability	ISO 23999:2008	X Direction: 0.08% Y Direction: 0.07%
Curling	ISO 23999:2008	≤1.0mm
Residual indentation	ISO 24343-1:2007	-0.04mm
Light stability	ISO105-B02:Method 3	≥6
Castor chair	ISO4918	After 25000 cycles, test specimens no visible damage
Classification	EN ISO 10S82	23,31/33,42
Reaction to fire	EN 13501-1	Bfl-S1
Slip resistance	DIN 51130:2010 EN 13893	R10 DS
Wear resistance	EN 660-2	500 grams of pressure The amount of wear ≤0.015g
Thermal resistance	EN 12667:2001	0.038m <sup>2</sup> K/W
Determination of resistance to stains chemical resistance	ISO26987:2008	Resistant
Squareness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.05mm Y Direction: 0.00mm~+0.05mm
Straightness	ISO24342:2007	Deviation range: X Direction: 0.00mm~+0.03mm Y Direction: 0.00mm~+0.05mm
Peel resistance	ISO 24345:2006	X Direction: 6SN/50mm Y Direction: 65N/50mm
Determination of resistance to stubbed and burning cigarettes	EN1399:1997 Method 8	Rating 3: Moderate change of gloss and moderate brown stain
Utilization		Recyclable